

## CTG31-LED 系列LED投光灯

CTG31-LED Series LED Spot Lights



泛光灯  
Floodlight



投光灯  
Spotlight

3

### 应用场所 Application

- ◆ 适用于船舶、海洋平台、港口、码头等作露天场所投光、泛光照明。
- ◆ Applicable for floodlighting in open spaces like ships, offshore platforms, ports, and wharfs, etc.

### 型号含义 Catalogue Number Logic




### 产品特性 Features

- ◆ 壳体采用不锈钢拉伸成型；
- ◆ 钢化玻璃透明罩，透光率高，抗冲击；
- ◆ 国际品牌LED光源，寿命长，绿色环保；
- ◆ 性能稳定的LED恒流源，宽电压输入，恒功率输出，并具有恒流、短路、过载等保护功能；
- ◆ 本产品为泛光照明式，有聚光式配光可选，若需要请订货时先注明；
- ◆ 灯体仰俯角度 $\pm 60^\circ$ 。
- ◆ Enclosure is stretching formed of stainless steel;
- ◆ Toughened glass transparent cover, high light transmittance, anti-impact;
- ◆ International brand of LED light source, long life, environment protection;
- ◆ LED constant current source with stable performance, wide voltage input, constant power output, with functions of constant current and protection against overcurrent, and short circuit etc. ;
- ◆ The product is of floodlight. Spotlight is optional, please specify when ordering;
- ◆ Pitching angle of  $\pm 60^\circ$  .

## 技术参数 Technical parameters

◆ 执行标准 Compliance	GB 11472 GB 7000.7 GB/T 24954
◆ 额定电压 Rated voltage	220V / 230V AC 50Hz/60Hz
◆ 温度范围 Temperature	-40°C~+55°C
◆ 额定功率 Rated power	LED
光源类型 Light source	LED
灯具功率 Power of lamp	30W, 50W, 70W
◆ 防护等级 Degree of protection	IP66
◆ 防腐等级 Corrosion-proof	WF2
◆ 电缆外径 Cable outer diameter	适合 $\phi$ 10~ $\phi$ 14mm 电缆连接 Suitable for cable of $\phi$ 10~ $\phi$ 14mm

## 外形尺寸 Outline dimension

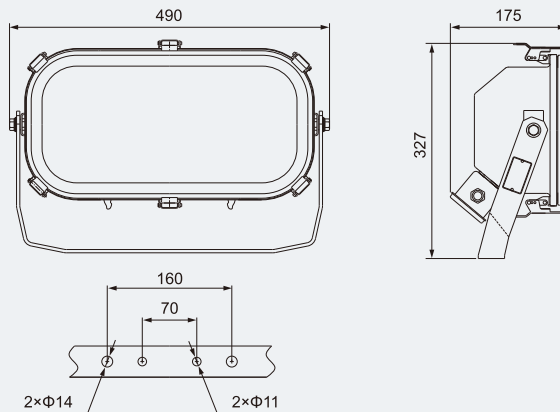

## 选配表 Selection table

型号 Model	额定电压(V) Rated voltage	额定功率(W) Rated power	光通量(lm) Luminous flux	防护等级 Degree of protection	电缆外径 Cable outer diameter	重量(kg) Weight
CTG31-LED30	220V / 230V AC 50 / 60 Hz	30	2700	IP66	$\phi$ 10~ $\phi$ 14mm	8.7
CTG31-LED50		50	4500			8.7
CTG31-LED70		70	6300			8.7