

# CTG33 系列投光灯

## CTG33 Series Spot Lights




3


### 应用场所 Application

- ◆ 适用于船舶、海洋平台、港口、码头等作露天场所搜索照明。
- ◆ Applicable for search lighting in open spaces like ships, offshore platforms, ports, and wharfs, etc..

### 型号含义 Catalogue Number Logic

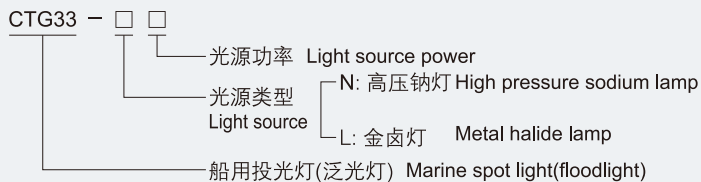

### 外形尺寸 Outline Dimension

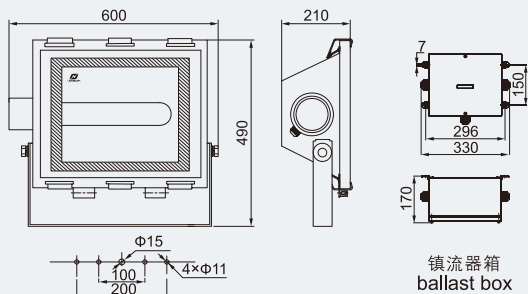

### 产品特性 Features

- ◆ 不锈钢外壳，具有较强的防腐能力；
- ◆ 抗高能量冲击的钢化玻璃；
- ◆ 硅橡胶密封圈，抗老化、耐高温，防护等级高；
- ◆ 采用搭扣方式紧固，便于检修；
- ◆ 灯具在仰角45°~90°可调。
- ◆ Stainless steel enclosure, with strong corrosion-proof performance;
- ◆ Toughened glass, resistant to high energy impact;
- ◆ Silicon rubber sealing ring, anti-aging, thermostability, high protection degree;
- ◆ Fixed by hasp type; easy for overhauling;
- ◆ Elevation angle can be adjusted within 45°~90°.

### 温度范围 Temperature

- ◆ -25°C~+55°C

### 电缆外径 Cable outer diameter

- ◆ 适合  $\phi 10\sim\phi 14\text{mm}$  电缆连接
- Suitable for cable of  $\phi 10\sim\phi 14\text{mm}$

### 选配表 Selection table

型号 Model	功率(W) Power	电压(V) Voltage	光通量(lm) Luminous flux	防护等级 Degree of protection	灯座 Lamp holder	电缆外径 Cable outer diameter	重量(kg) Weight
CTG33-N1000	1000	110 / 220	130000	IP56	E40	$\phi 10\sim\phi 14\text{mm}$	10.5
CTG33-L1000	1000		50000				