


# COURTYARD LIGHTS



## LED COURTYARD LIGHTS 庭院灯

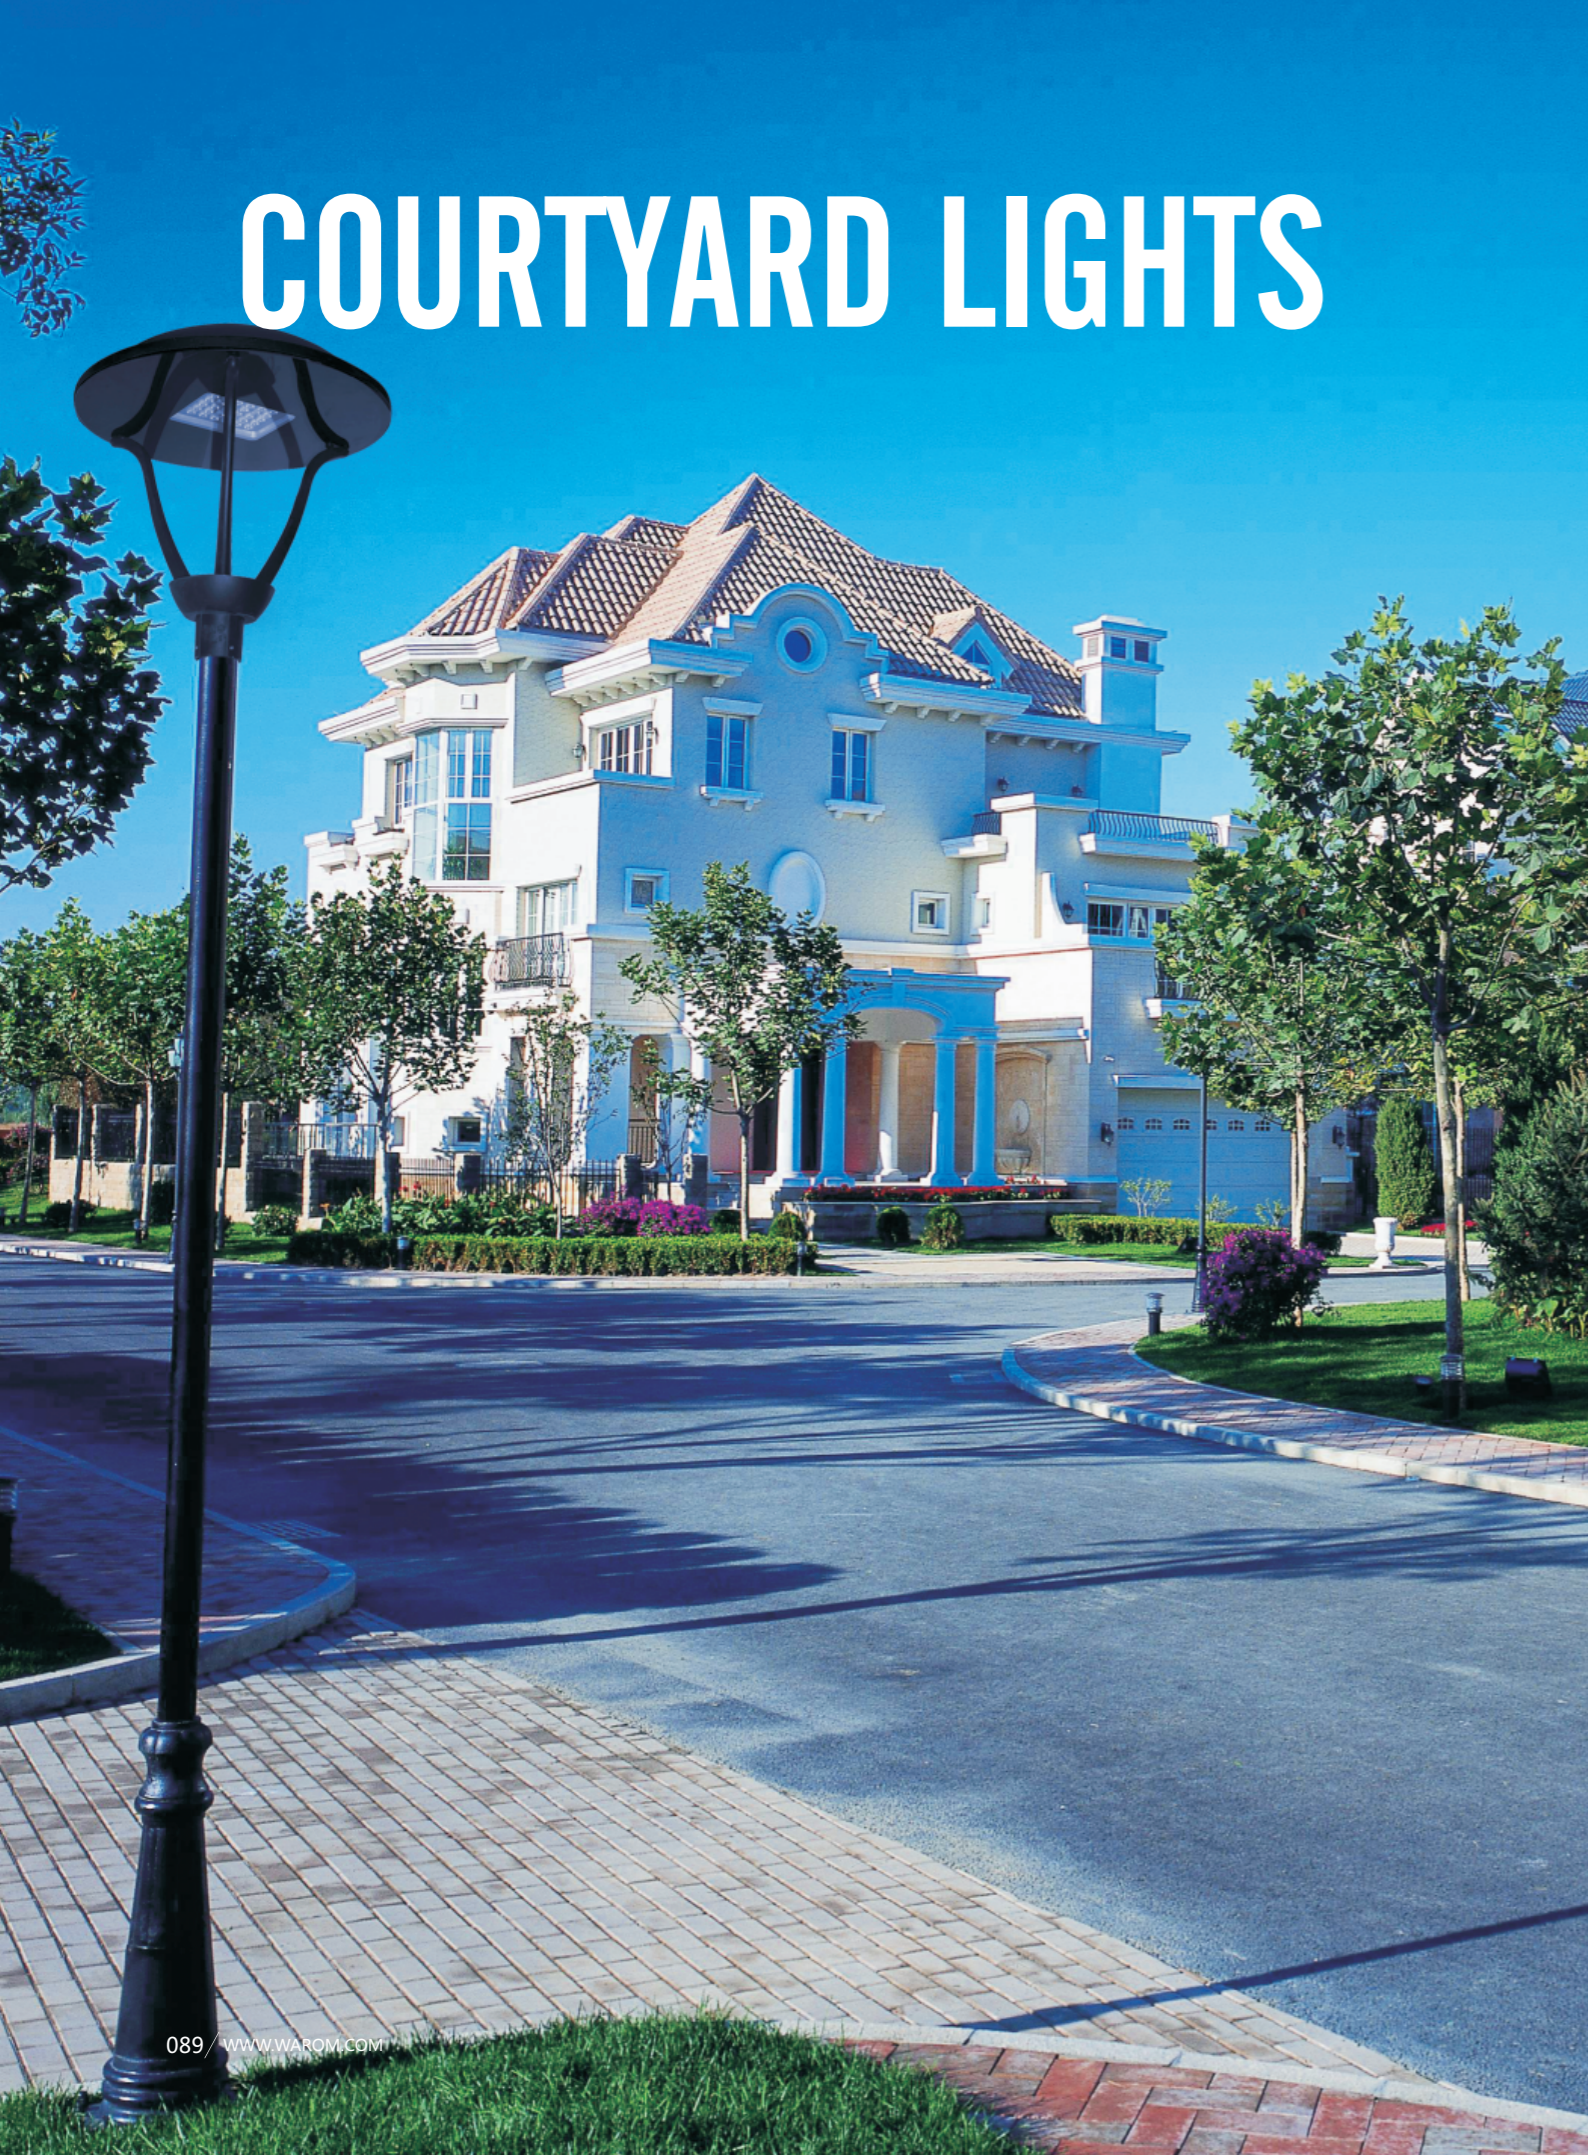


**HR3701-HR3718**  
20W ~ 200W

### Product Features :


- Die-cast aluminium alloy enclosure, electrostatic powder coated, stainless steel fastener.
- Every joint surface is sealed tightly, guarantee superior weather-proof and dust-proof performance.
- Superior polycarbonate diffuser, good light transmission performance, high intensity, long life time.
- Suitable height: 3~5 m.

### Model :

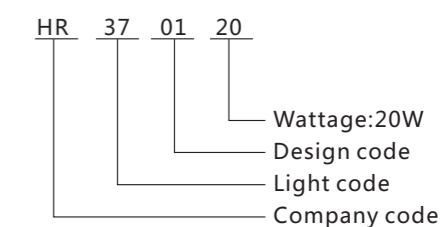

### Application Area :


- Widely used in city lighting project, highway, square, dock, courtyard etc..

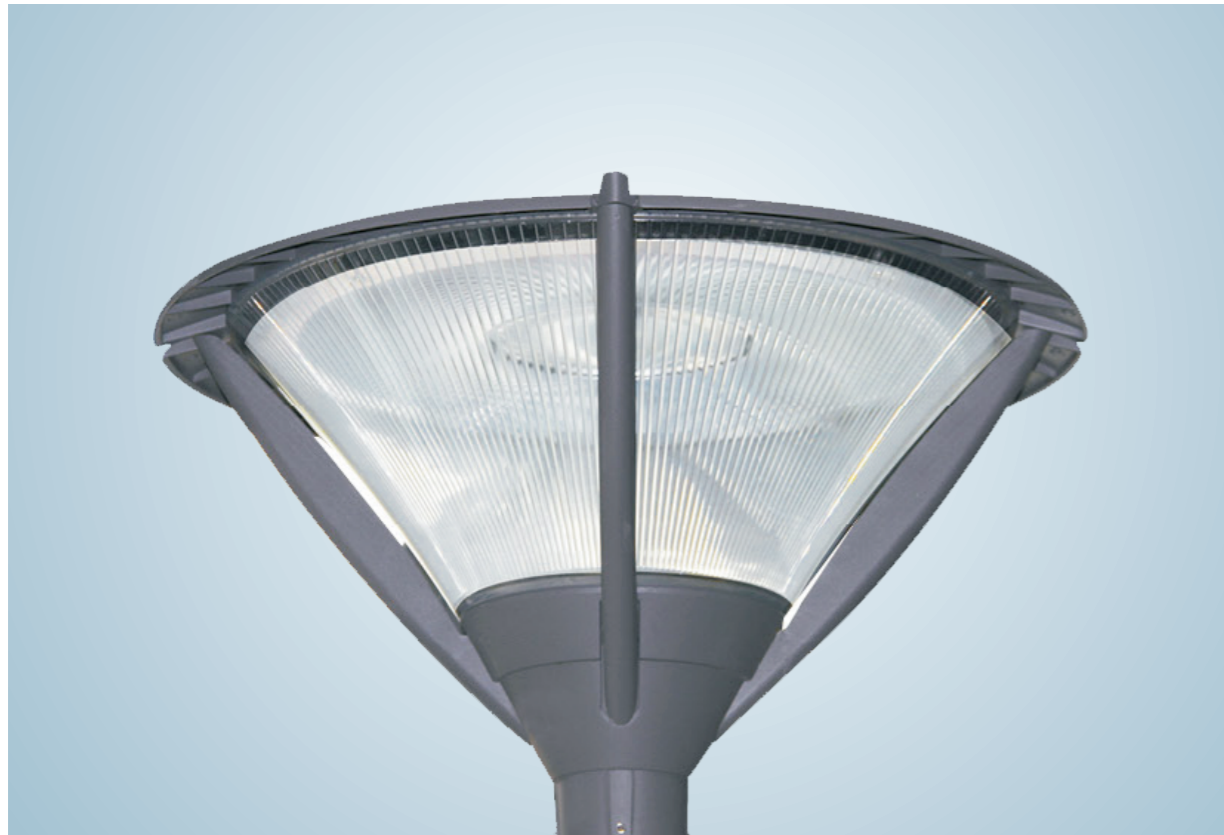

### HR3701 LED COURTYARD LIGHTS

20W

Product Dimension :

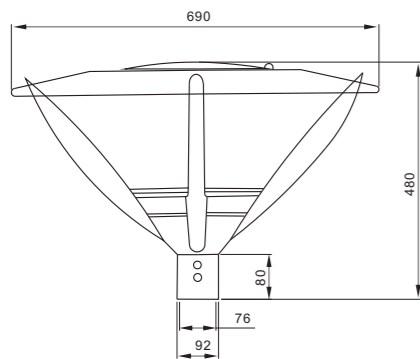


Product model	HR3701-20Z/HR3701-20N
Rated power	20W
Input voltage	AC220V 50/60Hz(Direct current supply available)
Available light source	LED Solid light source
Power factor	≥0.95
Color temperature(K)	5000-5500K/2800-3200K
Initial luminous flux(Lm)	1800Lm
Degree of protection	IP65



### HR3702 LED COURTYARD LIGHTS

30W

Product Dimension :

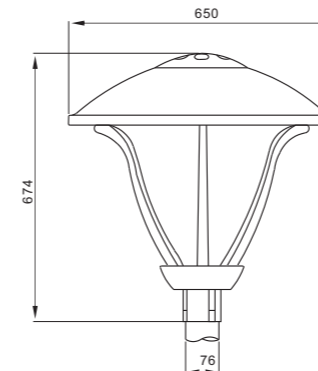


Product model	HR3702-30Z/HR3702-30N
Rated power	30W
Input voltage	AC220V 50/60Hz(Direct current supply available)
Available light source	LED Solid light source
Power factor	≥0.95
Color temperature(K)	5000-5500K/2800-3200K
Initial luminous flux(Lm)	2700Lm
Degree of protection	IP65





**HR3703 LED COURTYARD LIGHTS**  
30W

Product Dimension :


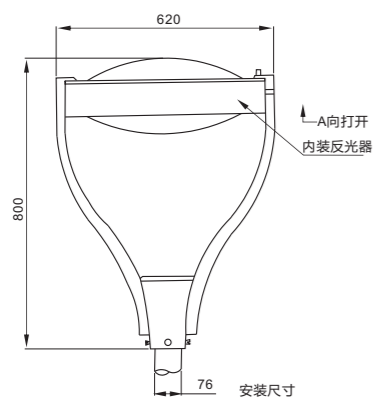


Product model	HR3703-30Z/HR3703-30N
Rated power	30W
Input voltage	AC220V 50/60Hz(Direct current supply available)
Available light source	LED Solid light source
Power factor	≥0.95
Color temperature(K)	5000-5500K/2800-3200K
Initial luminous flux(Lm)	2700Lm
Degree of protection	IP65



**HR3704 LED COURTYARD LIGHTS**  
30W

Product Dimension :

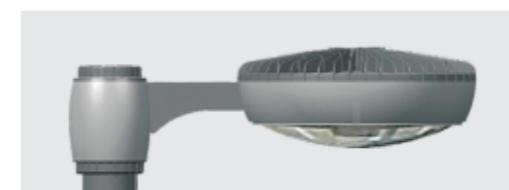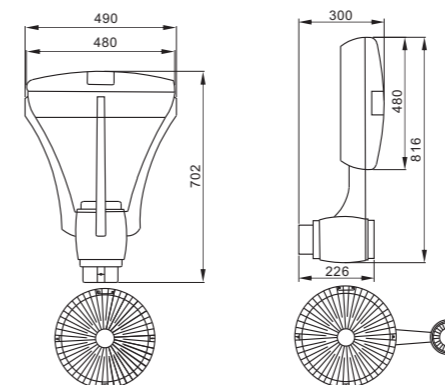


Product model	HR3704-30Z/HR3704-30N
Rated power	30W
Input voltage	AC220V 50/60Hz(Direct current supply available)
Available light source	LED Solid light source
Power factor	≥0.95
Color temperature(K)	5000-5500K/2800-3200K
Initial luminous flux(Lm)	2700Lm
Degree of protection	IP65



**HR3705 LED COURTYARD LIGHTS**

20W

Product Dimension :

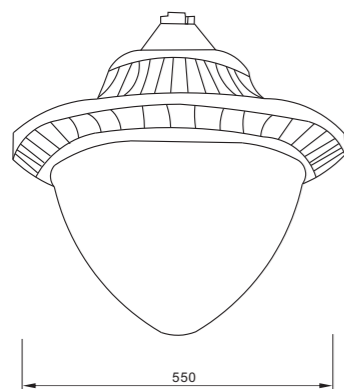


Product model	HR3705-20Z/HR3705-20N
Rated power	20W
Input voltage	AC220V 50/60Hz(Direct current supply available)
Available light source	LED Solid light source
Power factor	≥0.95
Color temperature(K)	5000-5500K/2800-3200K
Initial luminous flux(Lm)	1800Lm
Degree of protection	IP65



**HR3706 LED COURTYARD LIGHTS**

30W

Product Dimension :

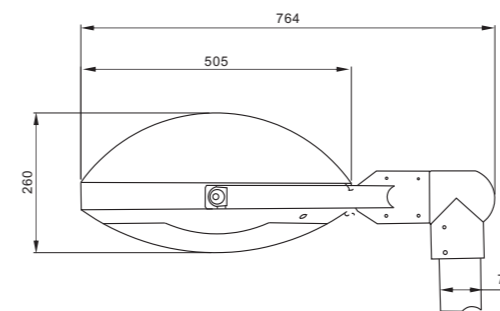

Product model	HR3706-30Z/HR3706-30N
Rated power	30W
Input voltage	AC220V 50/60Hz(Direct current supply available)
Available light source	LED Solid light source
Power factor	≥0.95
Color temperature(K)	5000-5500K/2800-3200K
Initial luminous flux(Lm)	2700Lm
Degree of protection	IP65

**HR3707-HR3712 COURTYARD LIGHTS**



Applicable lamp:LED,HIE,HSE,energy saving lamp;Power:20W-200W;Height:3-5 Meters.

**HR3713-HR3718 COURTYARD LIGHTS**



Applicable lamp:LED,HIE,HSE,energy saving lamp;Power:20W-200W;Height:3-5 Meters.