

# FHD 系列防水防尘防腐接线盒

## Series Weatherproof Junction Boxes



Waterproof



Dustproof




Corrosionproof

Weatherproof Pipe Fittings  
防水防尘防腐管件系列



### ◆ 型号规格含义/Catalogue Number Logic

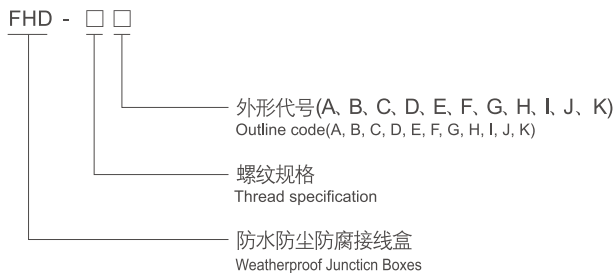

### ◆ 订货须知/Ordering Information

◇ 按照产品型号规格说明逐条选择。

例如: FHD-G3/4"B表示为管螺纹G3/4"直三通平盖防水防尘防腐接线盒;

FHD-G1/2"J表示为管螺纹G1/2"直角三通吊盖防水防尘防腐接线盒。

◇ Follow the product catalogue number logic for selection. For example: FHD-G3/4"B means weatherproof junction box, pipe thread G3/4"and two direct entries in horizon; FHD-G1/2"J means weatherproof junction box, pipe thread G1/2"and two perpendicular entries hung type cover

### ◆ 技术参数/Technical parameters

额定电压 / Rated voltage	380V
额定电流 / Rated current	20A
防护等级 / Degree of protection	IP65、IP66(可选/Optional)
防腐等级 / Corrosion-proof	WF1、WF2(可选/Optional)
螺纹规格 / Thread specification	G1/2" G3/4" G1"
接线端子数量 / Number of terminals	4



Waterproof



Dustproof



Corrosionproof

Weatherproof Pipe Fittings  
防水防尘防腐管件系列

### ◆ 产品特点/Product features

- ◇ 铝合金压铸壳体，表面高压静电喷塑；
- ◇ 主要用于管路配线、配管、接线、分线以及做为灯具安装附件用；
- ◇ 内装接线端子为四节；
- ◇ 螺纹规格可特制，如NPT螺纹等；
- ◇ 钢管布线(电缆布线请注明)。
- ◇ Die-casting aluminum alloy enclosure, powder coated surface
- ◇ Widely used for wire allocation of pipes pipe distribution,wiring and wire distribution
- ◇ Built in 4 pieces of terminals
- ◇ The thread can be specially made upon request, such as NPT thread.
- ◇ Steel pipe wiring is provided (please specify if cable wiring is needed).

### ◆ 外形代号/Outline code

FHD 系列防水防尘防腐接线盒代号，外形及名称一览表  
Table for the code, outline and name of FHD series weatherproof junction boxes

代号 Code	外形 Outline	名称 Name	代号 Code	外形 Outline	名称 Name
A	○	一通平 One Entry in horizon	F	◎	一通吊 One Entry hang type
B	○-○	直二通平 Two Direct entries in horizon	G	◎-◎	直二通吊 Two Direct entries hang type
C	○-○-○	三通平 Three Entries in horizon	H	◎-◎-◎	三通吊 Three Entries hang type
D	○-○-○-○	四通平 Four Entries in horizon	I	◎-◎-◎-◎	四通吊 Four Entries hang type
E	○-○	直角二通平 Two Perpendicular entries in horizon	J	◎-◎	直角二通吊 Two Perpendicular entries hang type
K	○-○	吊灯盒 Pendant lamp box			

注: "○"表示平盖, "◎"表示吊盖; "○-○"表示吊灯盒(K), 仅G3/4"规格;

吊盖通头: G1/2"规格产品吊盖通头为G1/2", 其它规格产品吊盖通头为G3/4", 特殊要求请注明;

通头一般为管螺纹G1/2"、G3/4"、G1" 如特殊要求可特制。

Note:"○"stands for horizontal cover, "◎"for hang cover stands for pendant light box-"○-○"-only G3/4"available.

Hang cover gland, G1/2"for: G1/2"products, G3/4"for other products, any special requirements please indicate;

The glands are usually for pipe thread G1/2", G3/4" and G1", other specification can also be made upon request.

### ◆ 外形及安装举例/Outline and mounting type

电缆外径 Φ,mm Cable outer diameter	管螺纹(G") Pipe thread	A	B
6~10	1/2	166	108
8~14	3/4	168	108
12~17	1	170	108

