

# FXJ-S-20/6 系列防水防尘防腐接线箱

## Series Weatherproof Terminal Boxes



Waterproof




Dustproof




Corrosionproof

Weatherproof Electrical Appliances  
防水防尘防腐电器系列

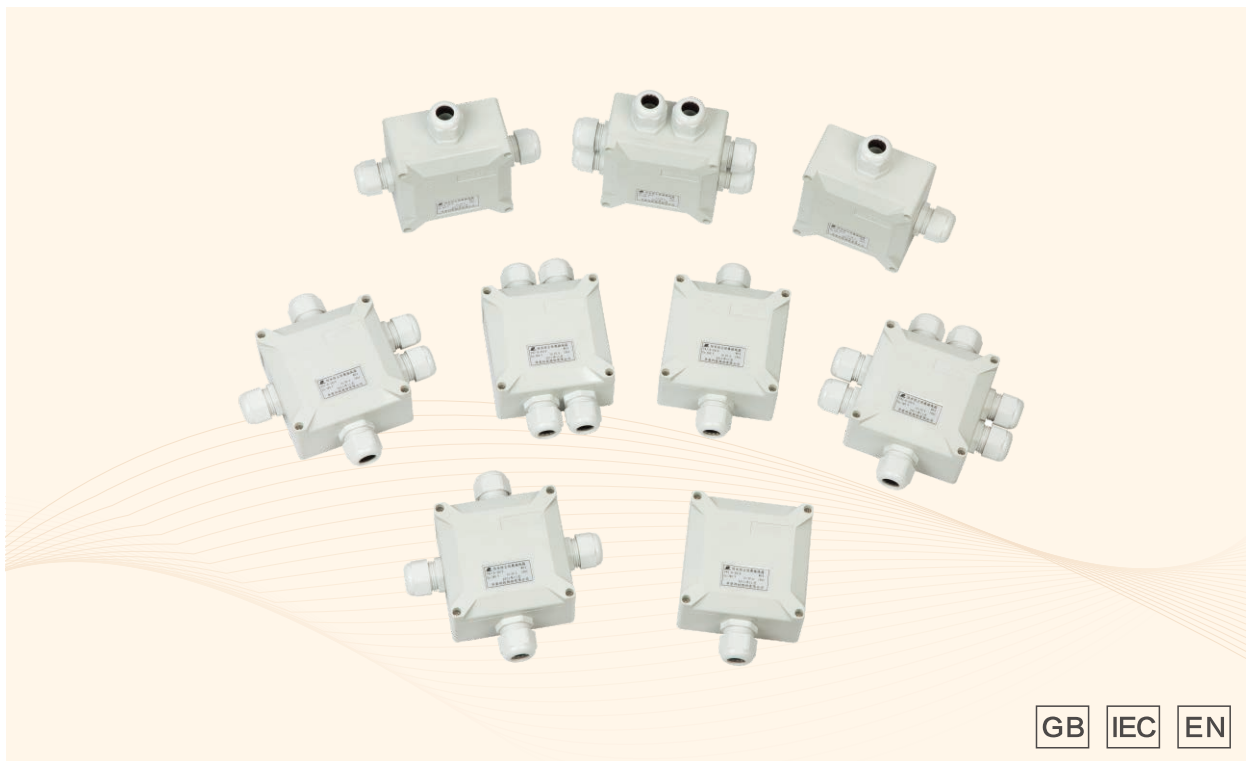

GB IEC EN

### ◆ 型号规格含义/Catalogue Number Logic

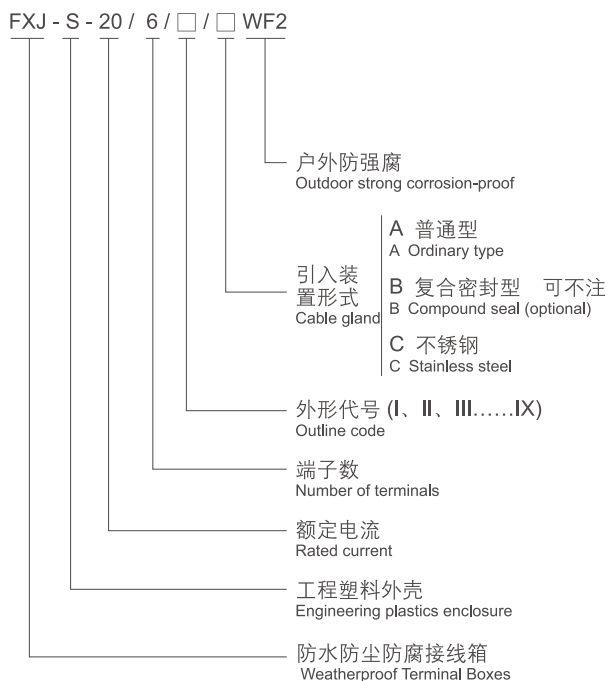

### ◆ 产品特点/Product features

- ◇ 本产品采用增强纤维不饱和聚酯树脂材料，模压成型，外形美观。具有抗老化、不变形、抗冲击、耐腐蚀等优点；
- ◇ 所有外露紧固件均采用不锈钢，密封件采用硅橡胶，耐油、耐酸、耐碱、耐高温、抗老化；
- ◇ 本系列产品为迷宫式防水结构，具有良好的防水、防尘性能；
- ◇ 本系列产品抗强酸、强碱、盐、海水、氯离子腐蚀；
- ◇ 内装元件为特制接线柱，接线方便快捷；
- ◇ 电缆布线（钢管布线请注明）。
- ◇ The product is made of glass fiber reinforced unsaturated polyester resin, compression molding, with beautiful appearance anti-aging, deformation-free, impact resistance and corrosion resistance etc.
- ◇ All exposed fasteners are made of stainless steel. Sealing parts are made of silicone rubber, with anti-oil, anti-acid, anti-alkali, high temperature resistance and ageing resistance.
- ◇ Labyrinth waterproof structure, with good waterproof and dustproof performance
- ◇ The product has strong acid and strong alkali resistance, anti-salt, anti-seawater and chloridion corrosion resistance.
- ◇ Inner elements are special-made binding post, fast and convenient.
- ◇ Cable wiring (please specify if steel pipe wiring is required)



Waterproof



Dustproof






Corrosionproof

Weatherproof Electrical Appliances Series


### ◆ 主要技术参数/Main technical parameters

执行标准 Executive standards	中国标准 Chinese National Standards	国际标准 International standards 欧盟标准/European standards	北美标准 American standards
工作电压 / Working voltage	220V/380V	415V	480V
额定电流 / Rated current	≤ 20		
防护等级 / Degree of protection	IP65		
防腐等级 / Corrosion-proof	WF2		
进出线口螺纹 Thread for inlet and outlet	M25 × 1 5引入口规格 Cable entry		
电缆外径 / Cable outer diameter	适合Φ9mm~Φ16mm电缆 Suitable for cable of Φ9mm~Φ16mm		
端子线径 / Wire diameter for terminal	0.5~2.5mm <sup>2</sup>		

### 引入装置/Cable gland

图片/Picture	名称/Name	代号/Code	规格/Specification
	普通引入装置 Ordinary cable gland	A	G3/4"
	复合密封引入装置 常规配置 Compound seal cable gland (general configuration)	B	M25 × 1.5
	不锈钢引入装置 Stainless steel cable gland	C	M25 × 1.5

### 内装元件/Built in components

图例/Picture	名称/Name	最大电流 A /Maximum current
	螺柱式接线端子/Stud terminals	20

### ◆ 外形及安装举例/Outline and mounting type

