# FZA 系列防水防尘防腐主令电器 Series Weatherproof Control Unit Systems












## ◆ 型号规格含义/Catalogue Number Logic



元件单元代号按P167页进行 The component unit code follows P167.

## ◆ 订货须知/Ordering information

◇ 二钮一灯, 2个按钮规格均为一常开一常闭标准型绿色按钮, 指示 灯为220V红色1个。标注为: FZA-A2D1

A2-2 III a2

D1-1Rf

green button, the indicator is red and of 220V. The product should be marked with: FZA- A2D1

> A2-2 III a2 D1-1Rf




#### ◆ 技术参数/Technical parameters


执行标准 / Executive standards	中国标准 / Chinese National Standards
额定电压 / Rated voltage	220V/380V、230V/400V
额定电流 / Rated current	3A
防护等级 / Degree of protection	IP65
防腐等级 / Corrosion-proof	WF2



- ◇ 外壳采用工程塑料压塑成形,外形美观。具有抗老化、不变形、抗冲击、耐腐蚀等优点;
- ◇ 本系列产品抗强酸、强碱、盐、海水、氯离子腐蚀;
- ◇ 内装元件主要有: 按钮, 指示灯等;
- ◇ 内装元件由我公司定型;
- ◇ 产品出厂铭牌上只体现总单元内容,各分单元代号为订货参数。注: 本产品最多只能装3个单元,如: 一钮、二钮、三钮、一钮一灯、一钮一开关、两钮一灯等若超出此范围时,请选用操作柱。
- Enclosure is made of engineering plastics through pressing, with beautiful appearance, anti-aging, deformation-free, impact resistance and corrosion resistance etc.
- The product has strong acid and strong alkali resistance, anti-salt, anti-seawater and chloridion corrosion resistance.
- OBuilt-in components: button, indicator, etc.
- ♦ The brand of inner components shall be recommended by our company.
- The nameplate of product shall only present the contents of general unit, and each sub-unit code is for ordering parameter.
- Note: no more than 3 units can be installed, such as, one button, two buttons, three buttons, one button and one light, one button and one switch, two buttons and one light, etc. if the units are more than 3, the control station should be taken.

#### ◆ 外形及安装举例/Outline and mounting type

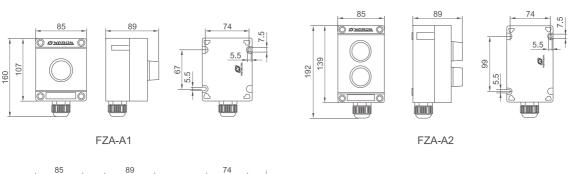



FZA-A3





