

LED UNDERGROUND LIGHTS 地埋灯



HR3601 / HR3602
3W / 6W / 9W / 12W / 15W / 18W

Product Features :


- Tight weatherproof structure, high sealing tightness, durable.
- Professional international optical design with high-efficient optical lens, lower degradation, good illuminance.
- International first class brand LED lamp with good performance.
- Reasonable heat dissipation design guarantee life time of light.

Light Material


- Aluminium alloy body, powder coated polyester, stainless steel fastener.

Application Area :

- Widely used in ground, lawn etc..

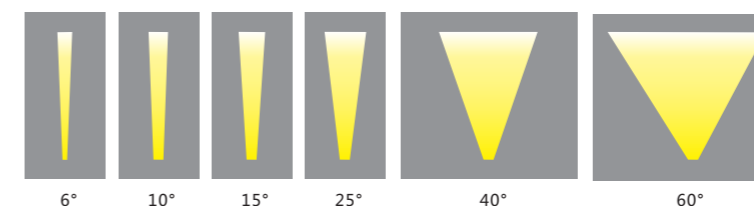

Model :

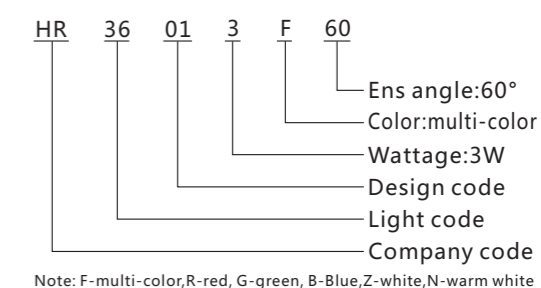

LED UNDERGROUND LIGHTS




Product model	HR3601-3	HR3601-6	HR3601-9
LED quantity	3PCS		
Power	3W	6W	9W
Voltage	DC12V/AC220V		
Single LED power	1-3W		
Working life	> 50000H		
LED color	RGB three-in-one discoloration, red, yellow, blue, green, white		
Color effect	chasing, watercourse, 256 grayscale, full color		
Beam angle	optional: 6°/10°/15°/25°/40°/60°		
LED driving method	constant current driving : 330mA		
Protection degree	IP67		
Electrical safety level	DC24V Category III/AC220V Category I		
Power line	DC24V 2*1.5mm ² rubber thread /AC220V 3*0.75mm ² rubber thread		
Signal line	2*0.35+1*0.5mm ² signal connector		
Controlling method	standard DMX512		
Ambient temperature	-25°C ~ +55°C		


HR3601 LED UNDERGROUND LIGHTS

3W / 6W / 9W


Product Dimension :

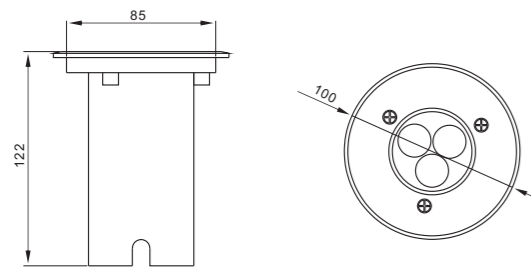

Product installation cutaway drawing :

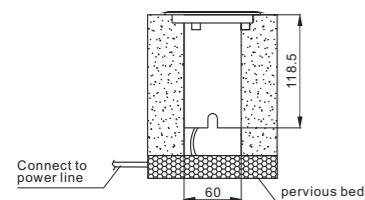

Warning:lightings should not soak in water for long time,dinas for pervious bed is required.

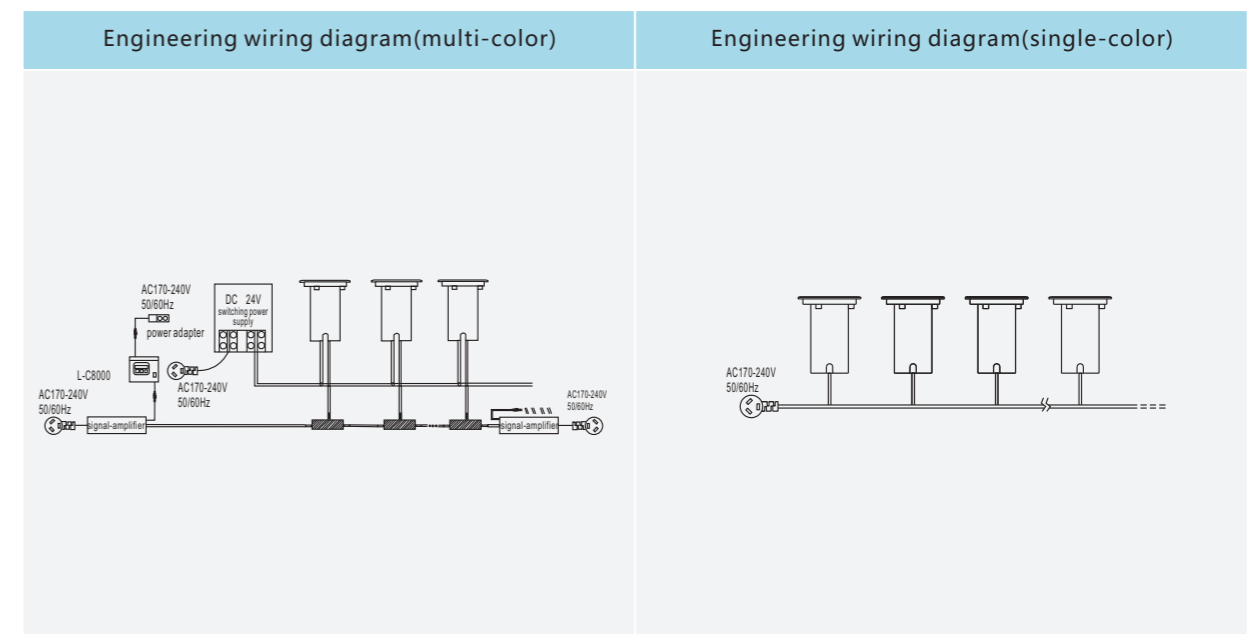




Product model	HR3602-6	HR3602-9	HR3602-12	HR3602-15	HR3602-18
LED quantity	6PCS				
Power	6W	9W	12W	15W	18W
Voltage	DC12V/AC220V				
Single LED power	1-3W				
Working life	> 50000H				
LED color	RGB three-in-one discoloration, red, yellow, blue, green, white				
Color effect	chasing, watercourse, 256 grayscale, full color				
Beam angle	optional: 6°/10°/15°/25°/40°/60°				
LED driving method	constant current driving : 330mA				
Protection degree	IP67				
Electrical safety level	DC24V Category III/AC220V Category I				
Power line	DC24V 2*1.5mm ² rubber thread /AC220V 3*0.75mm ² rubber thread				
Signal line	2*0.35+1*0.5mm ² signal connector				
Controlling method	standard DMX512				
Ambient temperature	-25°C ~ +55°C				

HR3602 LED UNDERGROUND LIGHTS

6W / 9W / 12W / 15W / 18W

Product Dimension :

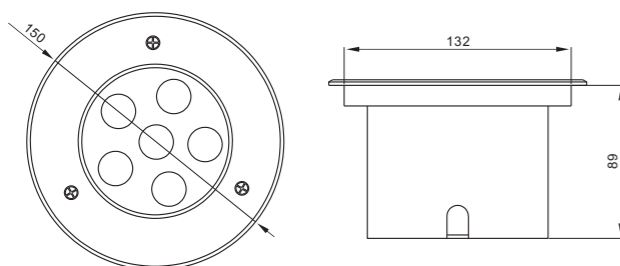

Product installation cutaway drawing :

