

# LED SPOTLIGHT



## LED SPOTLIGHT 射灯




### HR6201-HR6203 3W / 5W

#### Product Features :


- Fins heat dissipation mode and cool natural wind increase heat dissipation area, together with aluminum substrate heat dissipation structure, to guarantee terrific heat dissipation performance, high impact resistance.
- Application of high brightness and wattages LED particles, low energy consumption, high luminous efficiency, energy-saving.
- Lens can control light area and angle efficiently through light distribution optimization.
- Built-in constant current drive power , safe and no interference.

#### Model :

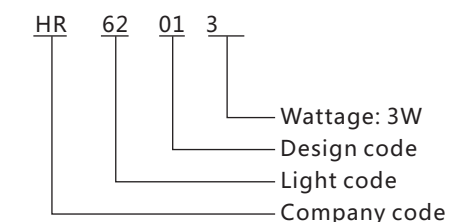

#### Application Area :

- Widely used in branded clothing shop, store, restaurant, showroom, kunsthau, expo, office, municipal engineering, family etc..

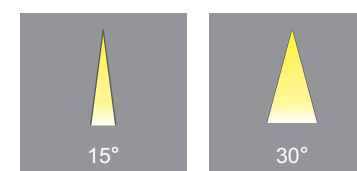





## HR6201 LED SPOTLIGHT



3W / 5W

Model	Power	Luminous flux	Color temperature	Color rendering	Enclosure material	Lamp holder	Input voltage	Weight
HR6201-3Z	3W	270Lm	Natural White	75	PMMA	GU5.3	ACDC12V	0.035kg
HR6201-3N	3W	255Lm	Warm White	80	PMMA	GU5.3	ACDC12V	0.035kg
HR6201-5Z	5W	450Lm	Natural White	75	PMMA	GU5.3	ACDC12V	0.035kg
HR6201-5N	5W	425Lm	Warm White	80	PMMA	GU5.3	ACDC12V	0.035kg

## HR6202 LED SPOTLIGHT

3W / 5W

Model	Power	Luminous flux	Color temperature	Color rendering	Enclosure material	Lamp holder	Input voltage	Weight
HR6202-3Z	3W	270Lm	Natural White	75	PMMA	GU10	AC220V	0.04kg
HR6202-3N	3W	255Lm	Warm White	80	PMMA	GU10	AC220V	0.04kg
HR6202-5Z	5W	450Lm	Natural White	75	PMMA	GU10	AC220V	0.04kg
HR6202-5N	5W	425Lm	Warm White	80	PMMA	GU10	AC220V	0.04kg

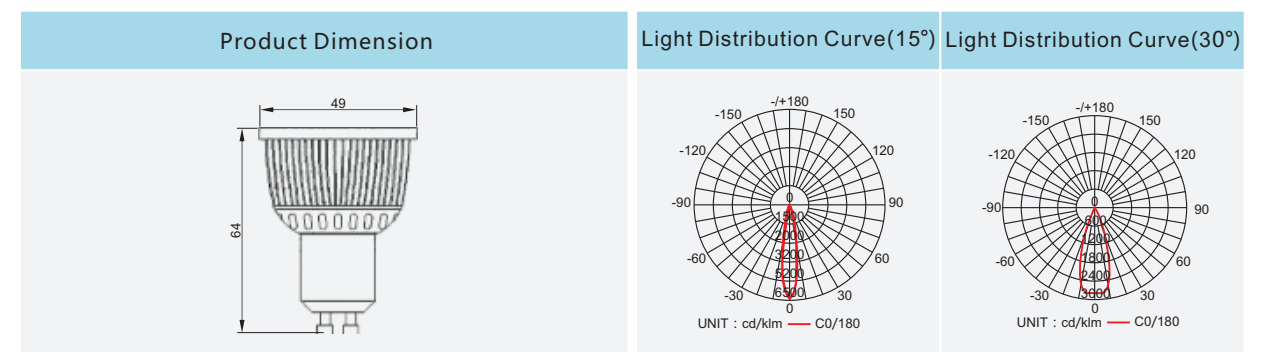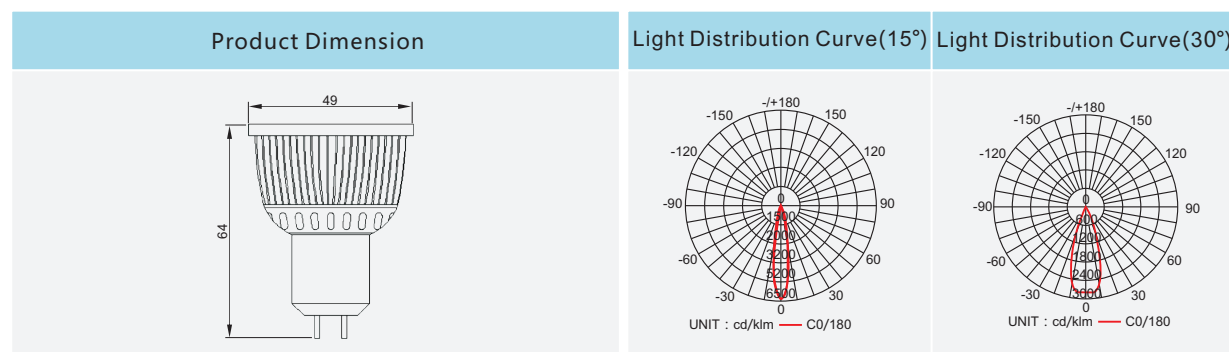



Model	Power	Luminous flux	Color temperature	Color rendering	Enclosure material	Lamp holder	Input voltage	Weight
HR6203-3Z	3W	270Lm	Natural White	75	PMMA	E27	AC220V	0.045kg
HR6203-3N	3W	255Lm	Warm White	80	PMMA	E27	AC220V	0.045kg
HR6203-5Z	5W	450Lm	Natural White	75	PMMA	E27	AC220V	0.045kg
HR6203-5N	5W	425Lm	Warm White	80	PMMA	E27	AC220V	0.045kg

## HR6203 LED SPOTLIGHT

3W / 5W

