

# CTG31 系列投光灯

## CTG31 Series Spot Lights




3


### 应用场所 Application

- ◆ 适用于船舶、海洋平台、港口、码头等作露天场所搜索照明。
- ◆ Applicable for search lighting in open spaces like ships, offshore platforms, ports, and wharfs, etc..

### 型号含义 Catalogue Number Logic

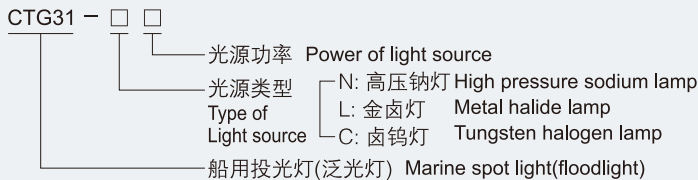

### 外形尺寸 Outline Dimension

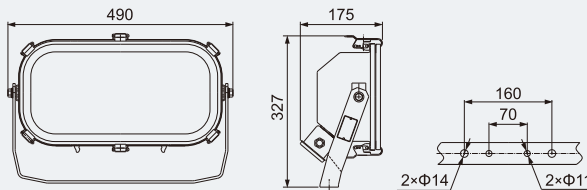

### 选配表 Selection table

型号 Model	功率(W) Power	电压(V) Voltage	光源 Light source	光通量 (lm) Luminous flux	防护等级 Degree of protection	灯座 Lamp holder	电缆外径 Cable outer diameter	重量(kg) Weight
CTG31-N250	250	110 / 220	高压钠灯 High pressure sodium lamp	28000	IP56	E40	Φ 10~Φ 14mm	7.5
CTG31-N400	400			48000				7.5
CTG31-L250	250		金卤灯 Metal halide lamp	20500				7.5
CTG31-L400	400			36000				7.5
CTG31-C500	500		卤钨灯 Tungsten halogen lamp	10000		R7S	7.2	

### 产品特性 Features

- ◆ 壳体拉伸成型、透明钢化玻璃，抗冲击性能好；镜面铝质反光镜，反射效率高；
- ◆ 灯体俯仰角度：±60°。
- ◆ Enclosure is stretching formed, with toughened glass transparent cover, and of good impact resistant performance; aluminium reflector, with high reflection efficiency;
- ◆ Pitching angle of lamp body: ±60° .

### 采用标准 Compliance

- ◆ GB11472 GB7000.7

### 温度范围 Temperature

- ◆ -25℃~+55℃

### 电缆外径 Cable outer diameter

- ◆ 适合 φ 10~ φ 14mm 电缆连接  
Suitable for cable of φ 10~ φ 14mm