


CTG32 系列投光灯  
CTG32 Series Spot Lights


## 应用场所 Application

- ◆ 适用于船舶、海洋平台、港口、码头等作露天场所搜索照明。
- ◆ Applicable for search lighting in open spaces like ships, offshore platforms, ports, and wharfs, etc.,

## 型号含义 Catalogue Number Logic

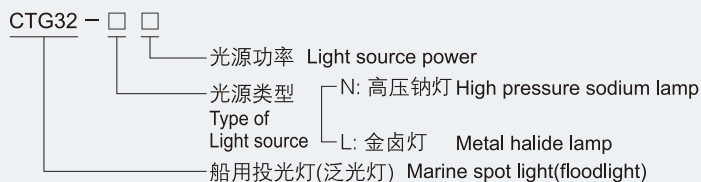

## 外形尺寸 Outline Dimension

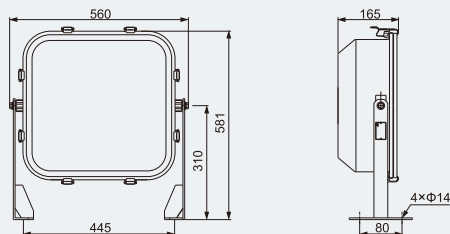

## 产品特性 Features

- ◆ 不锈钢壳体拉伸成型、透明钢化玻璃，防腐等级WF2；
- ◆ 内装双光源，为泛光型；
- ◆ 灯体俯仰角度：±30°。
- ◆ Enclosure is stretching formed of stainless steel, toughened glass transparent cover, corrosion-proof grade: WF2;
- ◆ Built-in dual-light source, floodlight type;
- ◆ Pitching angle of ±30°.

## 采用标准 Compliance

- ◆ GB11472 GB7000.7

## 温度范围 Temperature

- ◆ -25℃~+55℃

## 电缆外径 Cable outer diameter

- ◆ 适合 φ 10~ φ 14mm 电缆连接  
Suitable for cable of φ 10~ φ 14mm

## 选配表 Selection table

型号 Model	功率(W) Power	电压(V) Voltage	光源 Light source	光通量 (lm) Luminous flux	防护等级 Degree of protection	灯座 Lamp holder	电缆外径 Cable outer diameter	重量(kg) Weight
CTG32-N400	400×2	110 / 220	高压钠灯 High pressure sodium lamp	48000×2	IP56	E40	Φ 10~Φ 14mm	15.5
CTG32-L400			金卤灯 Metal halide lamp	38000×2				16.5